




# The J&M Model 815 Vibratory Driver / Extractor

Engineered for maximum versatility and maximum ownership utilization

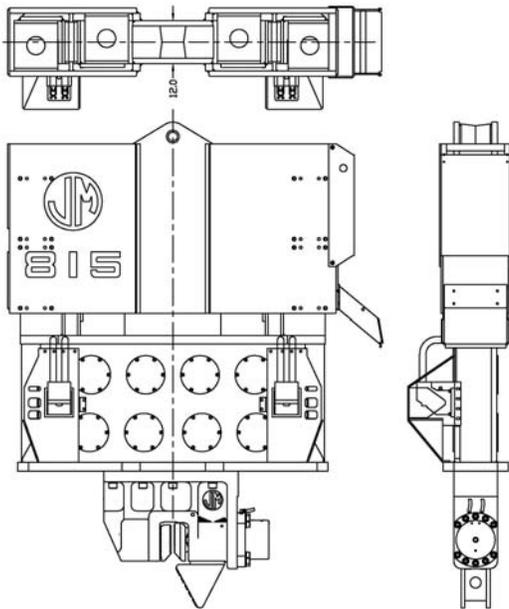

Gun Drilled Top Plate

- 4,400 In-lbs of precision cast Hi-Dent® eccentric moment provides the maximum amplitude to drive the heaviest piles even in highly elastic soils.
- Heavy weight suspension housing and soft elastomers provide industries smoothest operation with minimum boom shake.
- Narrow 12" throat width allows minimum width HRS & CRS sheet piles.
- Super-tough forged gears provide an unmatched 12-year useful life.
- 40-ton elastomeric suppressor handles your toughest pulling jobs while providing the industry's highest working toad safety factor.
- Supplied with environment friendly non-toxic biodegradable hydraulic oil.
- Heavy duty hydraulic motors are actually rated for 6000 PSI service.
- Clamps include internal holding valves for safety and extra-heavy wall cylinders machined from solid blocks to eliminate cylinder guards.
- Highest quality Commercial Intertech pumps and VOAC motors in time proven reliable open-loop hydraulic system ensure maximum efficiency. maximum reliability and simpler, quicker unit serviceability.
- Optional digital radio remote provides total operator freedom of movement.
- Made In the USA by the industry's most technologically innovative manufacturer of hydraulic vibratory pile drivers / extractors since 1974.
- Quickly adaptable for underwater, low headroom or box lead operation
- Made in the USA by the industries most technologically innovative manufacturer of hydraulic vibratory pile drivers / extractors since 1974

VIBRATOR		POWER UNIT	
Eccentric moment	4,400 inch/lbs (51 kg-m)	Engine	Caterpillar C-15
Frequency	1600 vpm	Power	580 HP (433 kW)
Centrifugal force	160 tons ( 1425 kN)	Operating speed	2100 RPM
Amplitude (free hanging)	1.17 in (30 mm)	Drive pressure	5,000 psi (345 bar)
Max line pull for extracting	40 ton (356 kN)	Drive flow	155 gpm (590 lpm)
Weight (no clamps or hoses)	11,500 lbs (5215 kg)	Clamp pressure	4,800 psi (331 bar)
Non-vibrating weight	4,000 lbs (1815 kg)	Clamp flow	6.5 gpm (25 lpm)
Height (without clamp)	96.6 in (2454 mm)	Weight (w/ full fuel & fluid)	15,400 lbs (6985 kg)
Length	103.5 in (2629 mm)	Length	158 in (4013 mm)
Width	28.5 in (724 mm)	Width	73 in (1854 mm)
Throat width	12 in (305 mm)	Height	95 in (2413 mm)
Hydraulic hose length	150 ft (45 m)	Hydraulic reservoir	385 gal (1460 l)
Hydraulic hose weight	1,700 lbs (770 kg)	Fuel capacity	150 gal (570 l)

HYDRAULIC CLAMPS:	Standard Universal Clamp	Single Sheet Z-Pile Clamp	Casing Clamps w/ 7 ft Beam	Concrete & Small Pipe Timber Clamp
Clamping force	125 tons (1112 kN)	125 tons (1112 kN)	160 tons (1423 kN)	53 ton (470 kN)
Weight	2,150 lbs (975 kg)	3,190 lbs (1447 kg)	3,260 lbs (1479 kg)	4970 lb (2255 kg)
Length	45.75 in (1160 mm)	48.5 in (1230 mm)	110 in (2795 mm)	43 in (1095 mm)
Width	12 in (305 mm)	18 in (460 mm)	13.75 in (350 mm)	27 in (685 mm)
Height	37.75 in (960 mm)	41.25 in (1050 mm)	26 in (660 mm)	79 in (2005 mm)

**Corporate Office**  
 7032 South 196<sup>th</sup> Street - Kent, WA 98032  
 Phone: 800-248-8498 - 253-872-0141  
 Fax: 253-872-8710  
<http://www.jandm-usa.com>